


# PALLINA PENDANT




## Pallina Pendant Configurations


Straight, 3 High, Diffuser Bubble

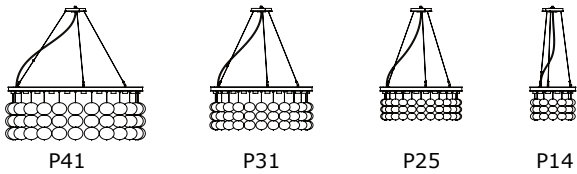



Straight, 5 High, Diffuser Bubble

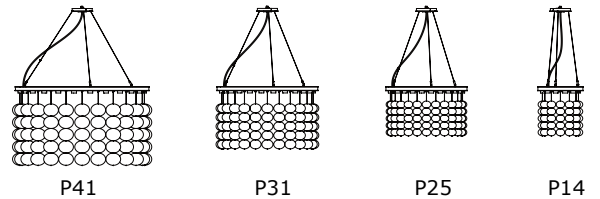

Staggered, 3 High, 2 High, Diffuser Bubble with Small Bubble

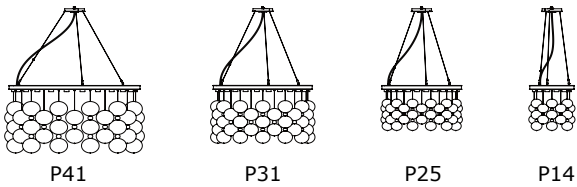

Staggered, 3 High, 2 High, Diffuser Bubble with Bead

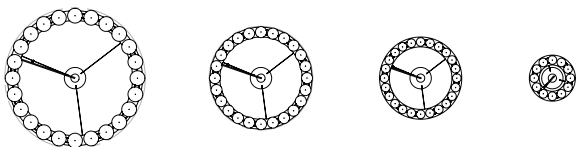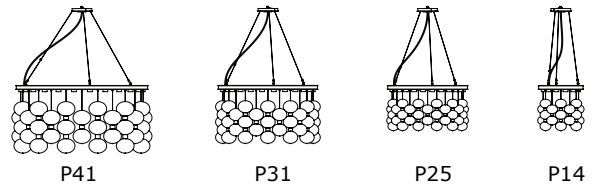

*(continued on next page)*

11828 NE 112th Street  
 Kirkland, WA 98033  
 (tel) 425.823.4560 / 800.755.0471  
 (fax) 425.823.8654  
 sales@charlesloomis.com  
 www.charlesloomis.com

June 2009

CHARLES LOOMIS, INC.  


# PALLINA PENDANT

## Pallina Pendant Specifications



### Dimensions:

	Diameter:	Height:
<i>Straight, 3 high:</i>		
P14	14"	6 3/8"
P25	25"	6 3/8"
P31	31 1/2"	8 1/4"
P41	42 3/4"	11 1/4"

### *Straight, 5 high:*

P14	14"	10 5/8"
P25	25"	10 5/8"
P31	31 1/2"	13 3/4"
P41	42 3/4"	18 3/4"

### *Staggered, 3 high, 2 high:*

P14	14"	9 3/4"
P25	25 3/4"	9 3/4"
P31	32 3/4"	13 1/4"
P41	44"	16"

### Overall Drop:

Adjustable

### Material/Finishes:

#### *Metal:*

Stainless Steel Polished CL435

#### *Diffusers:*

Standard 3 Bubble per Strand Configuration

#### P14:

(36) Hand Blown Glass Bubbles

#### P25, P31, P41:

(72) Hand Blown Glass Bubbles

### Lamping (Included):

#### *Halogen*

P14: (6) 20W MRC11

P25, P31, P41: (12) 20W MRC11

### Supply Voltage:

120V

### Listing:

UL or ETL Dry Location

### Mounting:

Under 50 lbs: Direct to Junction Box

Over 50 lbs: Additional Support Required

### Fixture Weights:

P14 = 20lbs.

P25 = 30 lbs.

P31 = 40 lbs.

P41 = 60 lbs.

### General Notes:

FOB - Kirkland, WA

Designed by Charles Loomis

### Contact:

sales@charlesloomis.com

425.823.4560

800.755.0471

Glass Bubbles are available in various textures, configurations, colors, and sizes. They may be stacked in columns of (3) or (5) and can be staggered or aligned in rows. Diffuser Bubbles may be alternated with a smaller bubble or solid bead.

**Please contact your local Representative for pricing and availability.**